


Semi-finished product range
Cast and moulded parts
Elastomer spring elements
Snow plow blades
Clutch packages
Protective jaws
PUR metal compounds
Concrete-wear parts
Wheels, rollers and mills



QUADRIGA-ELASTOMER-SPRING ELEMENTS

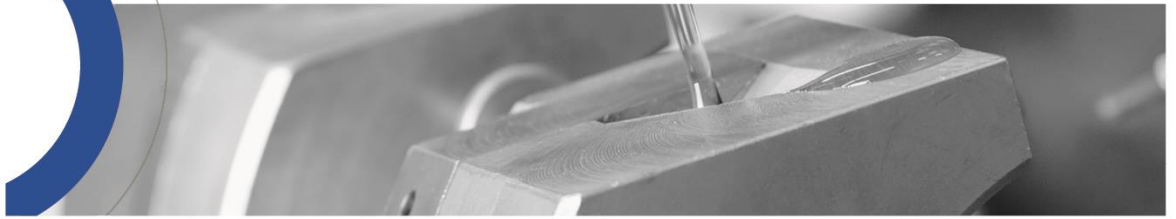

High quality - elastomer-spring-elements made of Original Vulkollan® D15 90 +5 Shore A red (standard-colour) or natural colour.

QUADRIGA-spring-elements are known for their defined spring characteristics even after long use, resistance to wear, abrasion and rupture, oil resistance and their long life performance. Elastomer-springs are specified in the DIN Standards 9835. These standards are fulfilled by the QUADRIGA-spring-elements.

Standard sizes

outside diameter mm	inside diameter mm	standard – length mm
16	6,5	12, 16, 20, 25, 200
20	8,5	16, 20, 25, 32, 290
25	8,5	20, 25, 32, 40, 290
25	10,5	20, 25, 32, 40, 290
32	13,5	32, 40, 40, 63, 500
40	13,5	32, 40, 50, 63, 80, 500
50	17	32, 40, 50, 63, 80, 100, 125, 500
63	17	32, 40, 50, 63, 80, 100, 125, 500
80	21	32, 40, 50, 63, 80, 100, 125, 500
100	21	32, 40, 50, 63, 80, 100, 125, 500
125	27	32, 40, 50, 63, 80, 100, 125, 160, 500

VULKOLLAN® is a registered trademark of Covestro Group

Tolerances: DIN 3302-1 M3 / standard sizes in accordance with DIN 9835

Wholesale prices, special versions, sizes and colours on request

Please contact our sales department.



QUADRIGA Dichtungs-GmbH

Gutenbergring 47

22848 NORDERSTEDT

GERMANY

T +49 40 528 704-0

F +49 40 523 73 24

info.quadriga@spaeh.de

www.quadriga-polyurethane.com

Issue: 06/04/2016

We are looking forward to your feedback. QUADRIGA – Competence in polyurethane